

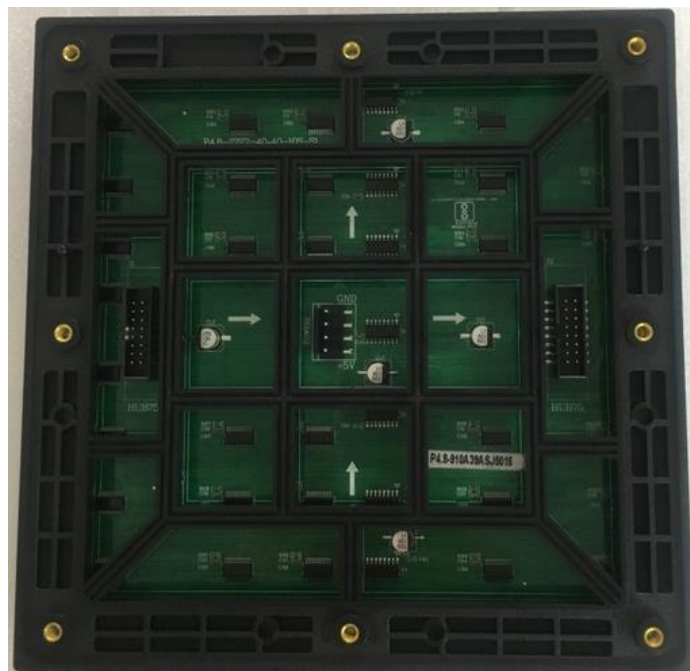


## P4.8 OUTDOOR SMD 3IN1 TECHNICAL

	Item	Parameter
Module	Model Number	P4.8-10S
	Module size	192mm*192mm
	Pixel pitch	4.8mm
	Pixels Density	43403 Dots/m <sup>2</sup>
	Pixel configuration	1R1G1B
	LED Package mode	SMD2727
	Pixel resolution	40dots(W)*40dots(H)
	Max Power	30W
	Module thickness	16mm
	Drive type	恒流驱动 Constant drive
	Scan mode	1/10 扫描 1/10scan
	Port type	HUB75
	Brightness of white balance	≥5500cd/m <sup>2</sup>

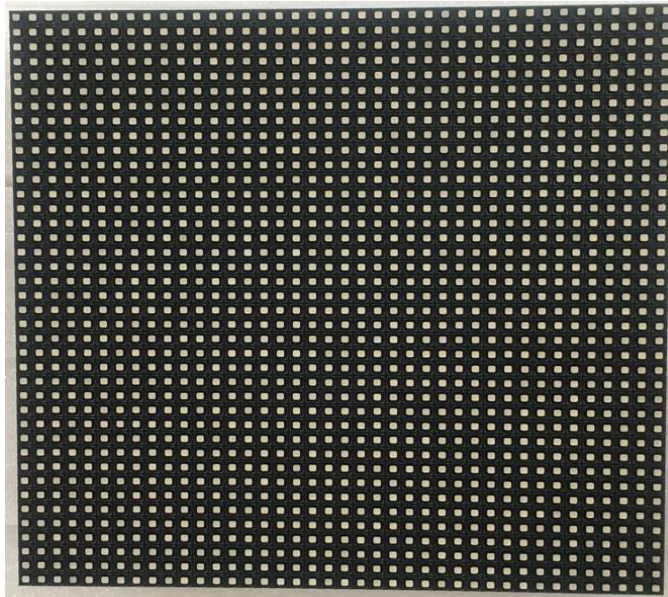

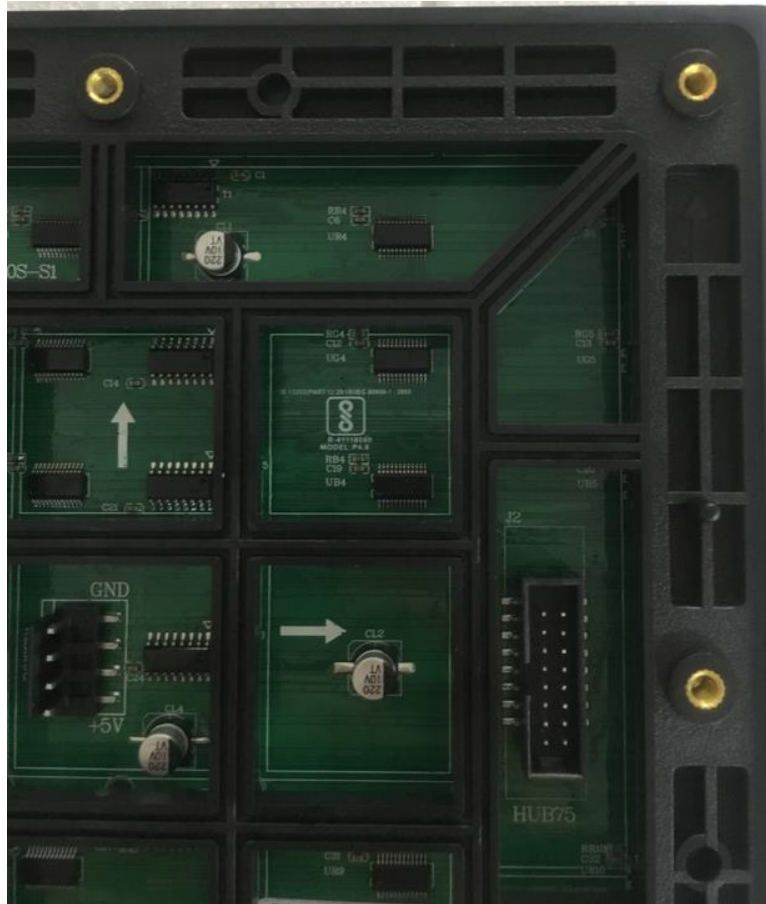

192mm\*192mm

	Dimension	576mm*576mm
--	-----------	-------------

Cabinet	Monomer Module Number	9
	Power supply	5V/40A*2 pcs
	Thermal discharge	fan 1pcs
	Pixel per cabinet	120*120
	Best viewing distance	5M~50M
	Best viewing angle	160° (W) 120° (H)
	Temperature	贮存 storage:-35℃~+85℃ 工作 working:-20℃~+50℃
	Relative humidity	10%-95%
	Thickness	65mm

Power	Working voltage	AC110V~220V±10%
	Average Power consumption	360W/m <sup>2</sup>
	Max.Power consumption	≤800W/m <sup>2</sup>
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1920HZ
	Grey scale/colors	4096 级,可显 16.7M 颜色 4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768