



P1.56 | INDOOR COB MICRO LED DISPLAY



- **Ultra-Fine Pixel Pitch** – 1.56 mm spacing for sharp, high-resolution visuals.
- **Wide Viewing Angle** – Consistent brightness and color from every direction.
- **High Refresh Rate** – ≥ 3840 Hz for smooth, flicker-free performance.






LED Display Parameters

Product: P1.56 Indoor Full Color LED Display

Item	Parameter
Model Number	P1.56 Indoor
Pixel Pitch	1.56 mm
Pixel Density	422,500 dots/m ²
Pixel Configuration	Micro LED Chip-on-Board (CoB)
Best Viewing Distance	1.5 m – 3 m
Color Processing Depth	20-bit
Viewing Angle	(H) 160 / (V) 155
Brightness	≥ 1000 cd/m ²
Brightness Uniformity	95%
Refresh Rate	≥ 3840 Hz
Contrast Ratio	25,000 : 1
Ingress Protection (Front/Rear)	IP50
Maintenance Type	Front Service
Life Span	≥ 100,000 hours
Aspect Ratio	16:9

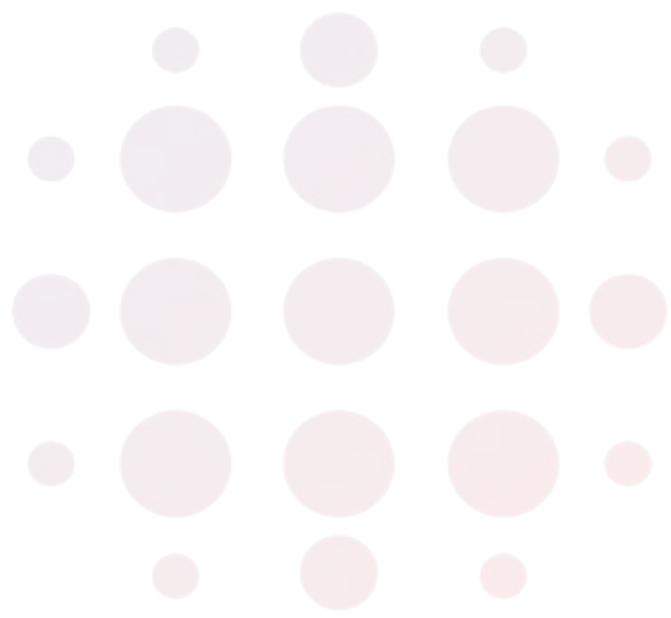

Contact Us

KAN Universal Pvt. Ltd.
367, First Floor, Kothi Wala Bagh,
Ashok Vihar Phase 4, Delhi-110052
www.kanuniversal.com

info@kanuniversal.com | +91-88788 72022

